



Panduit 원자력 Solutions

WIT 위트솔루션즈
Wise Industrial Technology

정차리 : 010.5092.7302

Panduit 동관 단자




- 한수원 등록 제품
- UL, CSA 만족 제품으로 35KA, 90°까지 사용가능
- Go/No-Go Gauge 공급 가능
- Available with NEMA hole sizes and spacing

전선사이즈	LCC (Long Barrel)
#6 AWG	LCC6-12-L
#4 AWG	LCC4-12-L
#2 AWG	LCC2-12-Q
#1 AWG	LCC1-12-E
#1/0 AWG	LCC1/0-12-X
#2/0 AWG	LCC2/0-12-X
3/0 AWG	LCC3/0-12-X
4/0 AWG	LCC4/0-12-X

전선사이즈	LCC (Long Barrel)
250MCM	LCC250-12-X
300MCM	LCC300-12-X
350MCM	LCC350-12-X
400MCM	LCC400-12-6
500MCM	LCC500-12-6
600MCM	LCC600-12-6
750MCM	LCC750-12-6
800MCM	LCC800-12-6
1000MCM	LCC1000-12-3

Panduit 압착단자

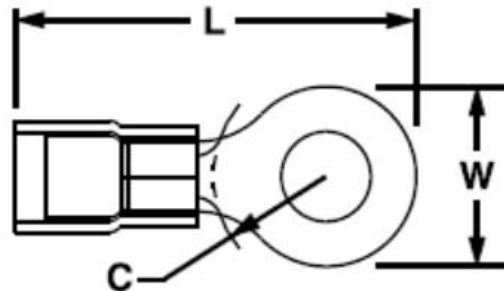



- Kynar & Vinyl 재질
- UL and CSA Rated up to 600V per UL 486A/B
- Kynar : Classified as Class 1E in accordance with IEEE 323-2003
- Flammability : UL 94V-0
- Go/No-Go Gauge 공급 가능

제품번호	전선사이즈	Stud Size	제품번호	전선사이즈	Stud Size
PK18-4R-C	22-16 AWG (0.5~1.0mm ²)	M2	PK8-8R-T	8 AWG (10m ²)	M4
PK18-6R-C		M3	PK8-10R-T		M5
PK18-8R-C		M4	PK8-14R-T		M6
PK18-10R-C		M5	PK8-56R-T		M8
PK18-14R-C		M6	PK8-38R-T		M10
PK18-38R-C		M10	PK8-12R-T		M12
PK18-56R-C	18-14 AWG (1.25~2.5m ²)	M8	PK6-8R-T	6 AWG (16m ²)	M4
PK14-4R-C		M2	PK6-10R-T		M5
PK14-6R-C		M3	PK6-14R-T		M6
PK14-8R-C		M4	PK6-56R-T		M8
PK14-10R-C		M5	PK6-38R-T		M10
PK14-14R-C		M6	PK6-12R-T		M12
PK14-38R-L	12-10 AWG (4.0~6.0m ²)	M10	PK4-10R-T	4 AWG (25m ²)	M5
PK14-56R-L		M8	PK4-14R-T		M6
PK10-6R-L		M3	PK4-56R-T		M8
PK10-8R-L		M4	PK4-38R-T		M10
PK10-10R-L		M5	PK4-12R-T		M12
PK10-14R-L		M6	PK2-10R-T	2 AWG (35m ²)	M5
PK10-38R-Q		M10	PK2-14R-T		M6
			PK2-56R-T		M8
			PK2-38R-T		M10
			PK2-12R-T		M12

Panduit Cable Marker



- IEEE 323-2003 테스트 마진에 따라 LOCA/MSLB 환경 테스트
- 난연재질
- 리본 : RMER4BL-A
- 사용온도 : -55 ~ 135 °C

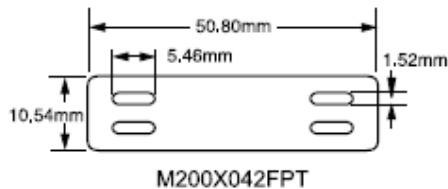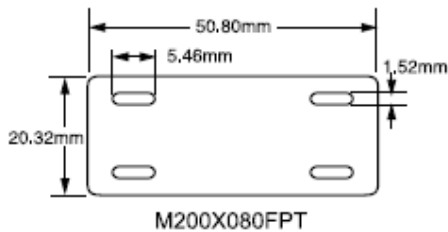

제품번호	폭(mm)	길이(mm)	라벨 수량/롤	최소 발주 수량
M200X042FQT	50.8	10.5	500	1 롤
M200X042FQT-B	50.8	10.5	2000	1 롤
M200X080FQT	50.8	20.3	500	1 롤
M200X080FQT-B	50.8	20.3	2000	1 롤

Panduit 망사튜브



- 판넬이나 장비 내부의 케이블 배선에 사용
- 경량의 내구성 재질로 유연성이 뛰어남
- 색상 : 검정, 흰색, 회색
- 난연 PET 재질의 난연등급 : UL224VW-1
- 사용온도 : -75 ~ 125 °C

Panduit 그로밋 엠텡



- 날카로운 면에서 케이블을 보호
- 판넬의 개구부에 설치하여 케이블을 보호
- 제품길이 : 30.5미터/롤
- UL94V-0 난연등급

제품번호	사이즈(mm)		판넬두께(mm)
	넓이	높이	
GEE36FR-CY	2.7	3.0	0.7 - 0.9
GEE62FR-CY	3.3	4.1	0.9 - 1.6
GEE99FR-CY	4.3	4.7	1.6 - 2.5
GEE144FR-CY	5.4	5.6	2.5 - 3.7

Panduit 케이블타이 & 마운트



- 내방사선 재질(Tefzel)
- 40년 수명 Test 제품
- 난연등급 : UL94V-0
- 사용온도 : - 60 ~ 170°C



- 테프젤 케이블 타이

제품번호	길이 (mm)	폭 (mm)	최대번들직경 (mm)	Min. Loop Tensile Strength N(kg)
PLT1M-C76	102	2.5	22	80(8.2)
PLT2I-C76	203	3.4	51	111(11.3)
PLT2S-C76	188	4.8	48	222(22.7)
PLT3S-C76	295	4.8	76	222(22.7)
PLT4S-C76	371	4.8	102	222(22.7)
PLT3H-L76	292	7.6	78	534(54.5)
PLT4H-L76	371	7.6	102	534(54.5)

감사합니다

서울특별시 송파구 송파대로 167
문정역 테라타워 A동 404호 위트솔루션즈
T. 02.2054.8688
F. 02.2054.8690
E. witsol@naver.com