

CABLE ROUTING CLIPS

FOR PHOTOVOLTAIC ELECTRICAL CABLES



Screwless and tool-free, clipped fastening solutions provide fast and simple assembly. It allows customers to reduce the overall cost of renewable energies.

Cable Routing Clips


- A large scope of solutions for fixing cables over, along or on the side of module edges or rail structures, in order to improve wirings.
- Cable routing clips represent easy and quick solutions for cable installations.



*Multi cables parallel to the edge.
One metal piece.*



Multi-directional cable routing

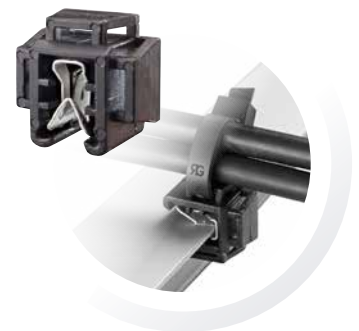

*Multidirectional cable routing.
Plastic contact only.*

BENEFITS

))) EASY TO USE

Tool free installation.

))) ROBUST

- Metal parts with surface treatment adapted to corrosive environments.
- Galvanic couple reduced with aluminum.
- With rolled edges to prevent damage to the sheath when pulling cables.
- Instant application achieved with the barb design.

))) EASE THE CABLE MAINTENANCE

Possibility to re-open the clips.

))) MULTIPURPOSE

- For supports with thicknesses from 0,7 to 4 mm: can fit on module edges or on structure.
- For cables 4, 6, 10 mm² section or strands.


TECHNICAL SPECIFICATIONS



	CLIPS MANAGING ONE CABLE			CLIPS MANAGING SEVERAL CABLES AND STRANDS		
ARTICLE N°	228185001	018690003	019659002	228187001	208738001: edge mounting adapter + 056476001: cable tie	236331000: edge mounting adapter + 056476001: cable tie
CABLE HOLDING	Metal	Metal	Metal	Metal	Metal/Plastic Any standard cable ties up to 3.6mm width	Plastic Any standard cable ties up to 5mm width
MATERIAL	C67S Steel	C67S Steel	C67S Steel	C67S Steel	C67S Steel Polyamid 6.6 (black color)	C67S Steel Housing & Tie: Polyamid 6.6 (black color) - RoHS compliant
SURFACE TREATMENT	Metal: Combines an inorganic zinc-rich with basecoat with aluminum-rich organic topcoat					-
CORROSION RESISTANCE	Metal: No red rust after 1 000 hours of Neutral salt spray according to EN ISO 9227:2012					-
CABLE ORIENTATION	Parallel to the edge	Parallel to the edge with guidance adjusted to different diameters	Perpendicular to the edge	Parallel to the edge	Multi-directional	Multi-directional
EXTERNAL DIAMETERS	Max. 8mm	From 4,5 to 10mm	From 5,7 to 7mm	Up to 16mm (or 4 cables of diam. 6mm)	With AR cable ties 3,6 x 200mm: Strand or cables with total diam. from 6 to 50mm max.	With AR cable ties 3,6x200mm: Strand or Cables with total diam. from 6 to 50 mm max.
THICKNESS RANGE OF THE SUPPORT (Module frame or structure)	2,25 to 2,75mm	0,8 to 3mm	0,7 to 2,1mm	1,5 to 2,5mm	1,5 to 4mm	1,5 to 3,5mm
POSSIBILITY TO RE-OPEN	YES	YES	YES	YES	Adapter unchanged/ New Cable tie	Adapter unchanged/ New Cable tie
QUANTITY OF PIECES PER BOX	1800	700	4000	600	208738001: 4300 056476001: 2000	236331000: 5000 056476001: 2000

Product Information disclosed in this "BROCHURE" can be modified without any previous notice.

IN SITUATION

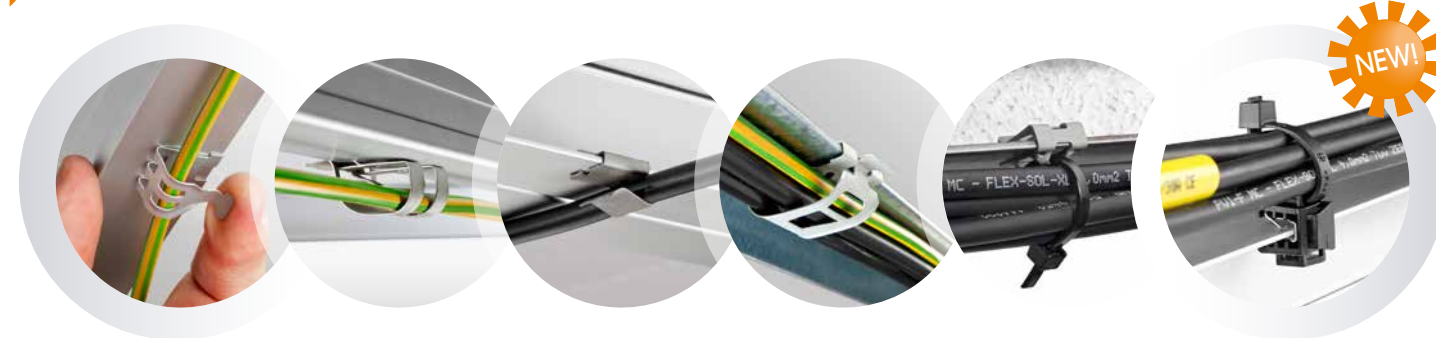

Ref. 228185001

Ref. 018690003

Ref. 019659002

Ref. 228187001

Ref. 208738001
+ Ref. 056476001

Ref. 236331000
+ Ref. 056476001

© Raygroup SASU

**ARaymond means, in this Brochure ARAYMOND ENERGIES SAS – RCS Grenoble 798 705 604 – 123 rue Hilaire de Chardonnet, ZA Technisud, 38100 Grenoble, FRANCE, that is the editor of this Brochure.

ARaymond™ is used as a trademark.

"Brochure" means the information and any materials available in this Brochure including, without any limitation, pictures, datasheets, product descriptions, etc. This Brochure does not constitute an offer or an agreement of any kind. This Brochure does not constitute a technical note. The Brochure is provided "as is" and only for evaluation purpose. ARaymond Energies makes no warranty or representation whatsoever regarding the Brochure, its use or its suitability to meet specific needs.

ARAYMOND ENERGIES DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE ACCURACY, RELIABILITY, NOVELTY, COMPLETENESS, MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE OF THE INFORMATION, NOR THAT WILL ITS USE NOT INFRINGE ON ANY THIRD PARTY'S RIGHTS. ARaymond Energies is not liable for any incidental, consequential or special damages of any kind due to the use of the Brochure. The Brochure and/or its contents is copyrighted works of ARaymond Energies and may be also protected by trademark laws, patent laws or other laws. All other copyrights, trademarks or patents not owned by ARaymond Energies are the property of their respective owners. The only use permitted is to consult the Brochure. Any rights not expressly granted herein are reserved. Except as expressly specified in these terms, nothing contained herein shall be construed as conferring any license or right of any copyright, trademark, patent, or any proprietary rights. Any unauthorized use of this Brochure may violate rights, and so, ARaymond Energies or any third party concerned may claim any damages or losses suffered. If you need further information, please contact ARaymond Energies.

EE_2015-1003-EN

www.araymond-energies.com

ARAYMOND ENERGIES
123 rue Hilaire de Chardonnet
ZA Technisud
38100 Grenoble
FRANCE

ARaymond 
MORE THAN FASTENING