



1920.CLICK series with splittable frames for cables with or without connectors

The splittable frames of the 1920.CLICK series accommodate up to 40 cables with or without connectors, with diameters from 2 to 31 mm. The frame is closed using two clamps at the sides. Despite the lack of screws, the mechanical sealing of the cables is perfect. The frame accommodates up to 10 small grommets, or 1 large and 6 small grommets.

- For small and large grommets (same frame)
- Click-closure (without screws)
- High pull-out forces in accordance with EN 62444
- Compact design
- Colour: Black
- Includes separate gasket
- Version with threaded inserts available on request




Accessories

Grommets of series 1929.SPC | Grommets of series 1929.SPL | Click-on covers of series 1920.FLAP | Inserts 1950.ISP | Mounting bolts 1950.Vx


Further information



Possible configurations for 1920.24.CLICK



Possible configurations for 1920.16.CLICK



Possible configurations for 1920.10.CLICK




Possible configurations for 1920.Q.CLICK



Product images

Dimensioned drawing 1920.xx.CLICK

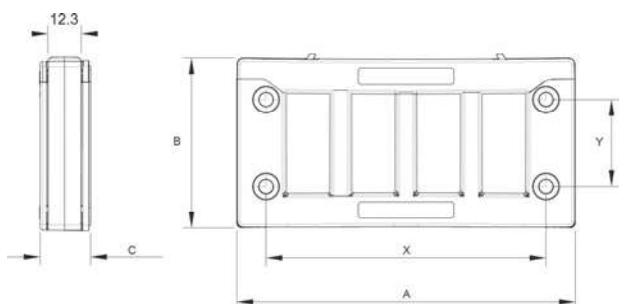

Material:PC + GF

Properties:Halogen-free, silicone-free

Flammability:Self-extinguishing in accordance with UL 94 V-0

Operating temperature:-40 °C / +155 °C

A	B	C	X	Y	>□<	Art.-No.	
mm	mm	mm	mm	mm	mm		
148.6	62.6	18.6	130	32	112x36	1920.24.CLICK	10
124.6	62.6	18.6	103	32	86x36	1920.16.CLICK	10
100.6	62.6	18.6	83	32	63x36	1920.10.CLICK	10
76.6	62.6	18.6	58	32	40x36	1920.Q.CLICK	10

Available on request:

Set of 4 fixing screws of stainless steel (AISI 304) with black Dacromet coating



FLAP-CLICK covers for 1920-series frames




The 1920.FLAP-CLICK series of click-on covers can be easily mounted onto matching frames of the types 1920.24.CLICK, 1920.16.CLICK, 1920.10.CLICK and 1920.Q.CLICK, making them particularly suitable where installation should be quick and straightforward.

- Quick installation for the 1920.CLICK series
- Self-extinguishing (V0) coating included
- Colour: Black



Dimensioned drawing 1920.FLAP.xx.CL

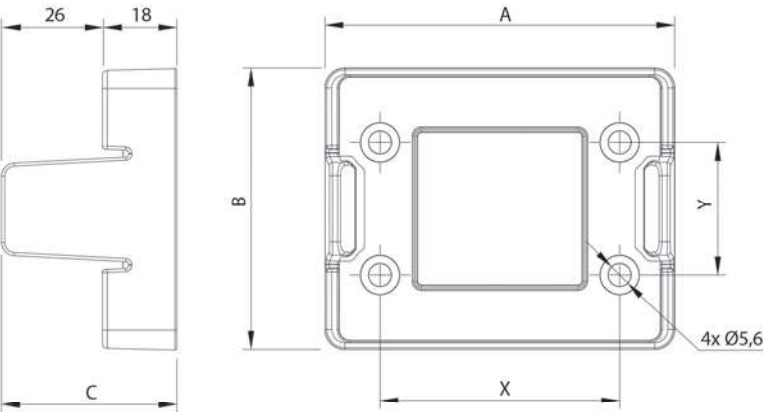

Material:	PC + GF
Properties:	Halogen-free, silicone-free
Flammability:	Self-extinguishing in accordance with UL 94 V-0
Operating temperature:	-40 °C / +155 °C



A	B	C	X	Y	>□<	Art.-No.	
mm	mm	mm	mm	mm	mm		
156.6	68.1	42.4	130.0	32.0	112x36	1920.FLAP.24.CL	10
132.6	68.1	42.4	103.0	32.0	86x36	1920.FLAP.16.CL	10
109.0	68.1	42.4	83.0	32.0	63x36	1920.FLAP.10.CL	10
84.6	68.1	42.4	58.0	32.0	40x36	1920.FLAP.Q.CL	10

1929.SPC – small cable grommets: single, double or quadruple

1929.SPC-series cable grommets allow cables with a diameter of 2 to 15 mm to be routed through split frames of the 1920 and 1925 series. The 2X and 4X versions allow multiple cables to be routed through the same grommet.

- Blanking-type cable grommets available
- UL 94 V-0
- Splittable grommets
- Colour: Grey




Further information



Product image

Dimensioned drawing 1929.SPC

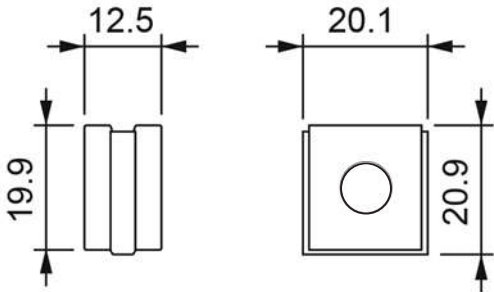

Material:	TPE
Properties:	Halogen-free, silicone-free
Flammability:	Self-extinguishing in accordance with UL 94 V-0
Operating temperature:	-40 °C / +110 °C

- Universal solution for cables of diameter 2 to 15 mm

	Ø	Ø	A	B	C	Art.-No.	
	min mm	max mm	mm	mm	mm		
0x	-	-	20.1	20.9	12.5	1929.SPC.0.G	10
1x	2.0	3.0	20.1	20.9	12.5	1929.SPC.2.G	10
1x	3.0	4.0	20.1	20.9	12.5	1929.SPC.3.G	10
1x	4.0	5.0	20.1	20.9	12.5	1929.SPC.4.G	10
1x	5.0	6.0	20.1	20.9	12.5	1929.SPC.5.G	10
1x	6.0	7.0	20.1	20.9	12.5	1929.SPC.6.G	10
1x	7.0	8.0	20.1	20.9	12.5	1929.SPC.7.G	10
1x	8.0	9.0	20.1	20.9	12.5	1929.SPC.8.G	10
1x	9.0	10.0	20.1	20.9	12.5	1929.SPC.9.G	10
1x	10.0	11.0	20.1	20.9	12.5	1929.SPC.10.G	10
1x	11.0	12.0	20.1	20.9	12.5	1929.SPC.11.G	10
1x	12.0	13.0	20.1	20.9	12.5	1929.SPC.12.G	10
1x	13.0	14.0	20.1	20.9	12.5	1929.SPC.13.G	10
1x	14.0	15.0	20.1	20.9	12.5	1929.SPC.14.G	10





- Universal solution for 2 cables of diameter 2 to 7 mm

	Ø mm	A mm	B mm	C mm	Art.-No.	
2x	2.0	20.1	20.9	12.5	1929.SPC.2X2.G	10
2x	3.0	20.1	20.9	12.5	1929.SPC.2X3.G	10
2x	4.0	20.1	20.9	12.5	1929.SPC.2X4.G	10
2x	5.0	20.1	20.9	12.5	1929.SPC.2X5.G	10
2x	6.0	20.1	20.9	12.5	1929.SPC.2X6.G	10
2x	7.0	20.1	20.9	12.5	1929.SPC.2X7.G	10



- Universal solution for 4 cables of diameter 2 to 6 mm

	Ø mm	A mm	B mm	C mm	Art.-No.	
4x	2.0	20.1	20.9	12.5	1929.SPC.4X2.G	10
4x	3.0	20.1	20.9	12.5	1929.SPC.4X3.G	10
4x	4.0	20.1	20.9	12.5	1929.SPC.4X4.G	10
4x	4.5	20.1	20.9	12.5	1929.SPC.4X4.5.G	10
4x	5.0	20.1	20.9	12.5	1929.SPC.4X5.G	10
4x	6.0	20.1	20.9	12.5	1929.SPC.4X6.G	10

1929.SPC.K – small cable grommets with extra flexibility in terms of cable diameter, for cables without pre-fitted connectors

1929.SPC.K grommets have a dual function: They can be installed to serve initially as blanking grommets that can later accommodate the feed-through of a single cable without a pre-fitted connector, or they can already accommodate such a feedthrough when installed. The model is available in four versions, depending on the cable diameter (from 2.5 to 14 mm). The double membrane ensures excellent protection against water and dust while also enhancing strain relief.

- Small grommets for cable diameters up to 14 mm
- Can be used in all frames of the 1920 series
- UL 94 V-0
- Colour: Grey




Further information



Product image

Dimensioned drawing 1929.SPC.K

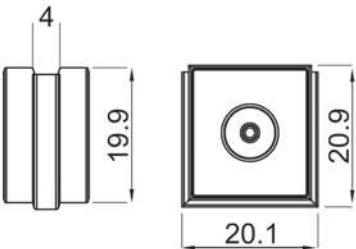

Material:	TPE
Properties:	Halogen-free, silicone-free
Flammability:	Self-extinguishing in accordance with UL 94 V-0
Operating temperature:	-40 °C / +110 °C

	Ø max mm	A mm	B mm	C mm	Art.-No.	
1x	8.0	20.1	20.9	19.9	1929.SPC.K1.G	10
1x	11.0	20.1	20.9	19.9	1929.SPC.K2.G	10
1x	13.0	20.1	20.9	19.9	1929.SPC.K3.G	10
1x	14.0	20.1	20.9	19.9	1929.SPC.K4.G	10






1929.SPL – large cable grommets

Grommets of the 1929.SPL series allow cables of diameter 11.5 to 31 mm to be routed through split frames of the 1920.CLICK series.

- Large grommets for cable diameters from 11.5 to 31 mm
- Can be used in 1920.CLICK frames
- Blanking-type cable grommets available
- UL 94 V-0
- Colour: Grey
- Splittable grommets



Dimensioned drawing 1929.SPL

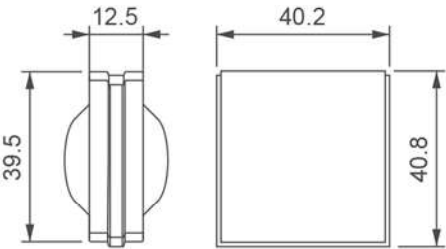

Material:	TPE
Properties:	Halogen-free, silicone-free
Flammability:	Self-extinguishing in accordance with UL 94 V-0
Operating temperature:	-40 °C / +110 °C



	Ø	Ø	A	B	C	Art.-No.	
min mm	max mm	mm	mm	mm	mm		
0x	-	-	40.2	40.8	12.5	1929.SPL.0.G	10
1x	11.5	16.0	40.2	40.8	12.5	1929.SPL.13.G	10
1x	16.0	20.0	40.2	40.8	12.5	1929.SPL.17.G	10
1x	20.0	24.0	40.2	40.8	12.5	1929.SPL.21.G	10
1x	24.0	28.0	40.2	40.8	12.5	1929.SPL.25.G	10
1x	28.0	31.0	40.2	40.8	12.5	1929.SPL.29.G	10

1929.SPL.M – large “membrane field” grommets

Grommets of the 1929.SPL.M series allow for the passage of a large number of cables without connectors through split 1920.CLICK-series frames, with a space-saving design. After the front membrane has been lightly perforated, an appropriately sized cable is pushed through. A second membrane ensures a perfect mechanical and fluid seal.

- Can accommodate numerous cables without connectors
- UL 94 V-0
- Strain relief in accordance with EN 62444
- Colour: Grey




Further information



Product image

Dimensioned drawing 1929.SPL.M

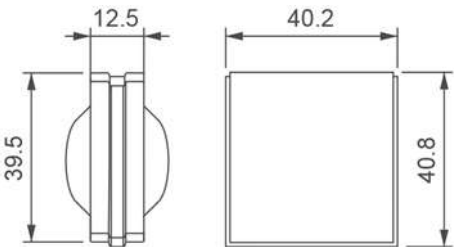

Material:	TPE
Properties:	Halogen-free, silicone-free
Flammability:	Self-extinguishing in accordance with UL 94 V-0
Operating temperature:	-40 °C / +110 °C

		Ø	Ø	A	B	C	Art.-No.	
		min mm	max mm	mm	mm	mm		
4x		11	16	40.2	40.8	12.5	1929.SPL.M4.G	10
8x		6	10	40.2	40.8	12.5	1929.SPL.M8.G	10
13x		4.5	6.5	40.2	40.8	12.5	1929.SPL.M13.G	10

