

ROHRflex PA 6-LG

ROHRflex corrugated plastic tubings


Protective all-plastic tubing slitted, internally and externally corrugated, fine profile, slitted, for retrofit and repair, HB (UL 94)

Temperature: -25°C ... +120°C

Material: PA 6 plastics

CHARACTERISTICS:

- Properties: air- and liquid-tight
- benzine resistant
- widely resistant to acid and solvents
- free of silicone, cadmium, halogen
- flame retardant
- high UV-resistance (black)

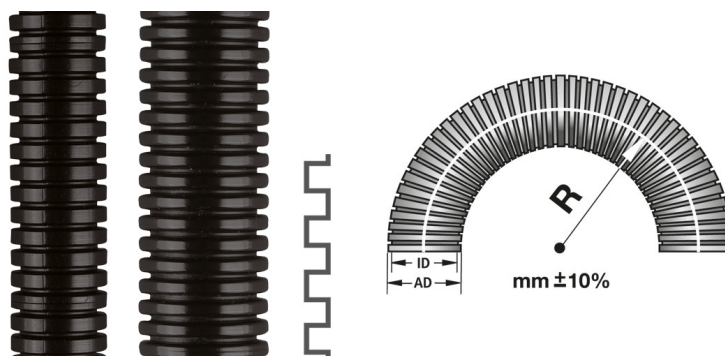

APPLICATIONS:

- Application: for retrofit and repair



FLEXA No.	Colour	OD [mm]	Profile	ID [mm]	OD [mm]	BR stat. [mm]	BR dyn. [mm]	Weight [kg/m]	PU [m]
10261242006	Black	10,0	fine	6,5	10,0	13	35	0,020	50
10261242010	Black	13,0	fine	10,0	13,0	20	45	0,024	50
10261242012	Black	15,8	fine	12,0	15,8	35	55	0,034	50
10261242016	Black	21,2	fine	16,5	21,2	45	75	0,056	50
10261242023	Black	28,5	fine	22	28,5	55	100	0,100	50
10261242029	Black	34,5	fine	29,0	34,5	65	120	0,122	25
10261242036	Black	42,5	fine	35,5	42,5	90	150	0,145	25
10261242048	Black	54,5	fine	48,0	54,5	100	190	0,225	25

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.