



케이블 액세서리 선정 가이드


Panduit Cable Accessories Selection Guide · English Edition

Global Industrial Cable Management Solutions · Authorized Distributor

Cable Accessories

Material Selections

A comprehensive reference for selecting cable accessories based on material properties and application requirements

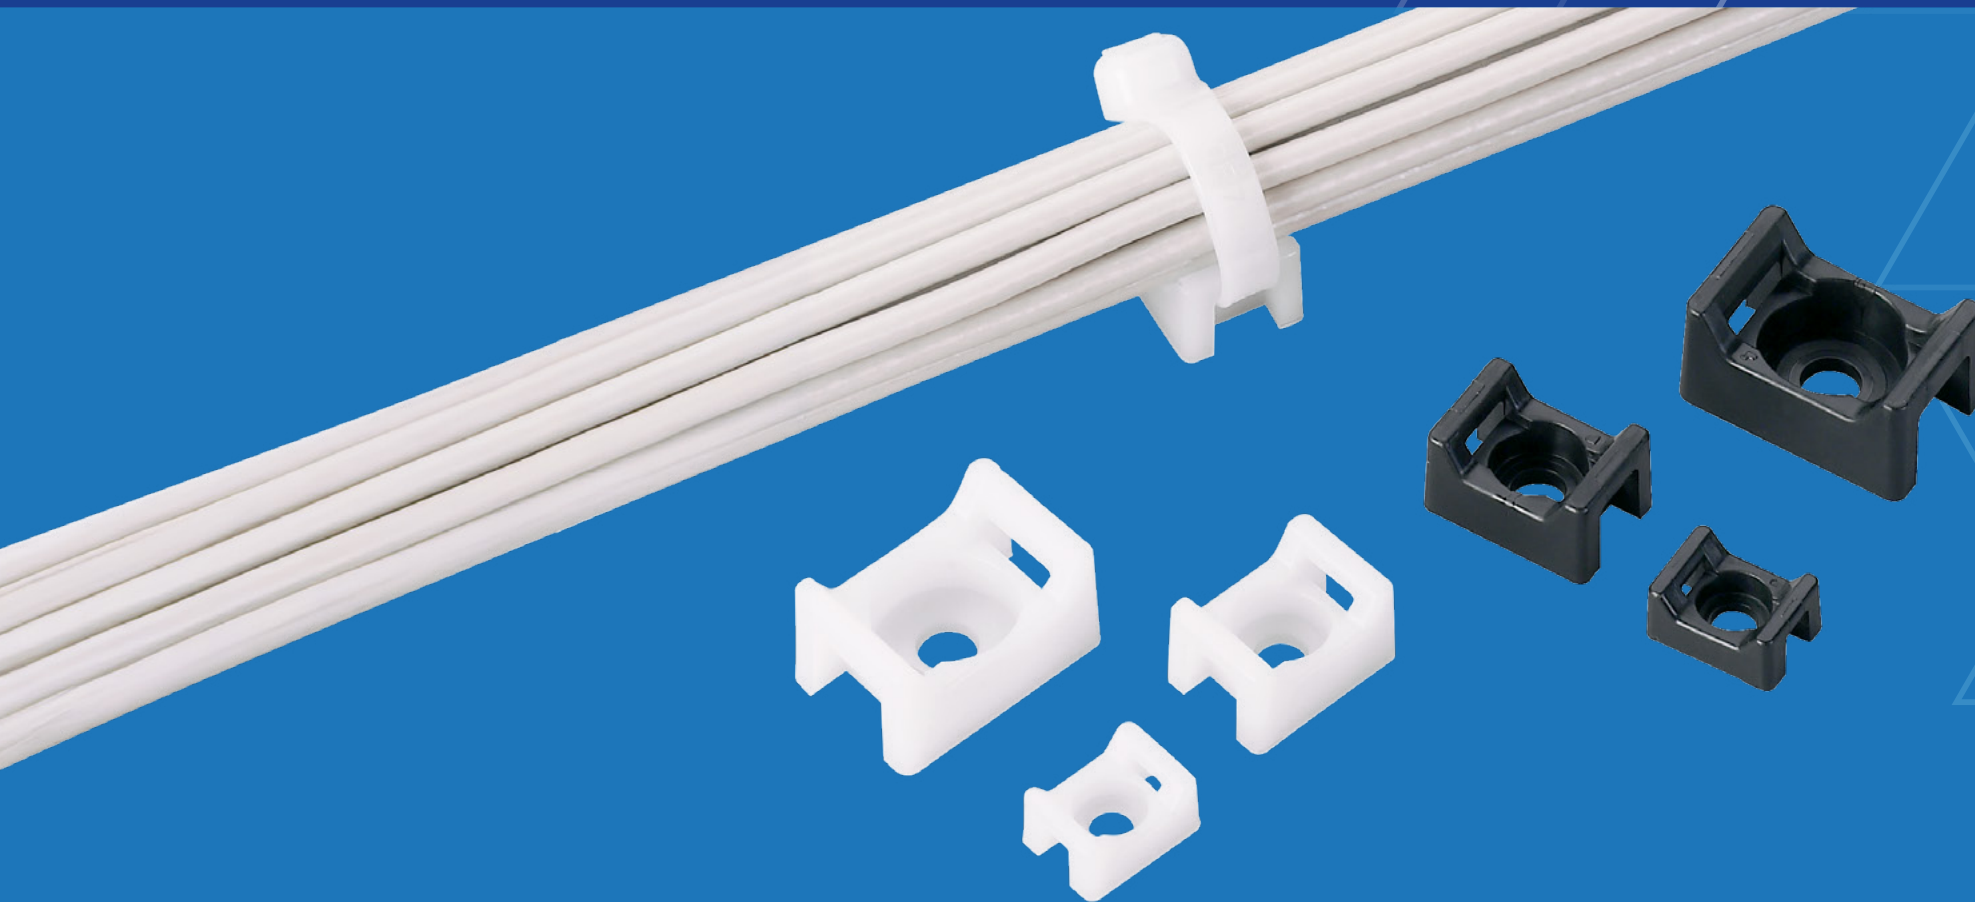

PANDUIT®

Selection Guide

Cable Accessories

	Material	Test Method	Nylon 6.6	Weather Resistant Nylon 6.6	Impact Modified Weather Resistant Nylon 6.6	Heat Stabilized Nylon 6.6	Heat Stabilized Nylon 6.6	Heat Stabilized Weather Resistant Nylon 6.6	Impact Modified Heat Stabilized Weather Resistant Nylon 6.6	Flame Retardant Nylon 6.6	Flame Retardant Nylon 6.6	Polypropylene	Weather Resistant Polypropylene	General Purpose ABS	Weather Resistant ABS	TEFZEL*	PEEK	Antimicrobial Metal Detectable Nylon	Metal Detectable Polypropylene	PVC	Weather Resistant Acetal	
	Color	–	Natural, White, Black, Gray	Black			Natural	Black			Natural	Gray, White, Green	Black	Natural, White, Black, Gray	Black	Aqua Blue	Translucent Brown	Blue	Dark Blue	Light Gray, White	Black	
	Part Number Suffix (Material) Designation	–	None, 20, 14	0	0	30	39	300	350	60	69	14, None, 109	100	None, 20, 14	0	76	71	96A	186	8, 10	130	
Mechanical Properties	Tensile at Yield 73°F (psi)	ISO 527	12,000		7,500	12,000			8,700	11,000		4,100		6,500		7,500	15,200	–	–	–	6,500	
	Water Absorption (24 Hours)	ASTM D570	1.2%								1.1%		0.1%		0.3%		<0.03%	0.5%	1.2%	0.1%	0.3%	<0.45%
	Radiation Resistance Rads	–	1 x 10 ⁵									1 X 10 ⁶		–	–	2 x 10 ⁸	1 x 10 ⁹	–	1 x 10 ⁶	–	6 x 10 ⁵	
	Weathering Life Expectancy (Years)/UV Resistance**	–	1-2	7-9		4-5	1-2	7-9		1-2			7-9	1	7-9	>15	–	–	1	–	>20	
	Impact Resistance	–	○	○	🟢	○	○	○	🟢	🟡	🟡	🟢	🟢	🟢	🟢	🟢	🟢	🟢	○	🟢	○	🟢
Chemical Resistance	Salts	–	🟡	🟡	🟡	🟡	🟡	🟡	🟡	🟡	🟡	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟡	🟢	🟡	○
	Hydrocarbons (Gas, Oil, Lubricants)	–	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	○	○	🟡	🟡	🟢	🟢	🟢	○	🟢	🟢	
	Chlorinated Hydrocarbons	–	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	○	○	🟡	🟡	🟢	🟢	🟢	○	🟢	🟢	
	Acids	–	🟡	🟡	🟡	🟡	🟡	🟡	🟡	🟡	🟡	🟢	🟢	○	○	🟢	○	🟡	🟢	🟡	🟡	
	Bases	–	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟡	
	Acid Rain	–	🟡	🟡	🟡	🟡	🟡	🟡	🟡	🟡	🟡	🟢	🟢	🟢	🟢	🟢	🟢	🟢	🟡	🟢	🟢	🟡
Thermal Properties	Continuous Use Temperature Range	UL 746B	-76 °F - 185 °F (-60 °C - 85 °C)			-76 °F - 239 °F (-60 °C - 115 °C)				-76 °F - 212 °F (-60 °C - 100 °C)		-76 °F - 239 °F (-60 °C - 115 °C)		-76 °F -158 °F (-60 °C - 70 °C)		-76 °F - 338 °F (-60 °C - 170 °C)	-76 °F - 464 °F (-60 °C - 240 °C)	-76 °F - 185 °F (-60 °C - 85 °C)	-76 °F - 239 °F (-60 °C - 115 °C)	-40 °F - 122 °F (-40 °C - 50 °C)	-76 °F - 185 °F (-60 °C - 85 °C)	
	Flammability Rating	UL 94	V-2		HB	V-2			HB	V-0		HB			V-0		V-2	HB			V-0	HB
	Low Smoke	ASTM E662	PASS								–	–	–	–	–	–	–	PASS	–	–	–	–
	Oxygen Index	BS ISO 4589	28		–	28			22	34		–	–	18-20		30	35	–	–	–	–	
	Halogen Free	IEC 60754-2	Yes																			
	Burning Fume Toxicity	BSS-7239	PASS									–	–	–	–	–	–	–	–	–	–	–
	Heat Deflection Temperature at 1.9 Mpa	ASTM D648 ISO 75-1/-2	158 °F (70 °C)		145 °F (63 °C)	158 °F (70 °C)			145 °F (63 °C)	149 °F (65 °C)		122 °F (50 °C)		210 °F (99 °C)		–	313 °F (156 °C)	–	–	–	147 °F (64 °C)	
RELATIVE PRICE	–	Low				Med								Low		High		Low	Med	Low	Med	

Recommendation Legend				
Highest	High	Acceptable	Low	Lowest
●	●	○	●	●

*TEFZEL is a registered trademark of The Chemours Company
**Weather Life Expectancy is an estimated life expectancy and not a guarantee of life expectancy

Properties shown are based on data obtained from third party resources and are subject to normal manufacturing tolerances.

Material Selection Guide

	Materials	Test Method	Nylon 6.6	Weather Resistant Nylon 6.6	Impact Modified Weather Resistant Nylon 6.6	Heat Stabilized Nylon 6.6	Heat Stabilized Nylon 6.6	Heat Stabilized Weather Resistant Nylon 6.6	Impact Modified Heat Stabilized Weather Resistant Nylon 6.6	Flame Retardant Nylon 6.6	Flame Retardant Nylon 6.6	Polypropylene	Weather Resistant Polypropylene	General Purpose ABS	Weather Resistant ABS	TEFZEL	PEEK	Antimicrobial Metal Detectable Nylon	Metal Detectable Polypropylene	PVC	Weather Resistant Acetal
	Color	-	Natural, White, Black, Gray	Black	Black	Black	Natural	Black	Black	Black	Natural	Gray, White, Green	Black	Natural, White, Black, Gray	Black	Aqua Blue	Translucent Brown	Blue	Dark Blue	Light Gray, White	Black
	Part Number Suffix (Material) Designation	-	None, 20, 14	0	0	30	39	300	350	60	69	14, None, 109	100	None, 20, 14	0	76	71	96A	186	8, 10	130
4-Way and Multiple Bridge Mounts	ABMQS	-	-	-	-	-	-	-	-	-	-	-	-	✓	-	-	-	-	-	-	-
	ABM1M	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	ABMM	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-
	ABM2S	-	-	-	-	-	-	-	-	-	-	-	-	✓	✓	-	-	-	-	-	-
	ABM100	-	✓	✓	-	-	-	-	-	-	✓	-	-	-	-	-	-	-	-	-	-
	ABM112	-	✓	✓	-	-	-	-	-	-	✓	-	-	-	-	-	-	-	-	-	-
	ABM3H	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	ABM4H	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	SGABM20	-	✓	✓	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-
	SGABM25	-	✓	✓	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-
	SGABM30	-	✓	✓	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-
	SGABM40	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	SGABM50	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Aerial Support Ties	AST	-	-	-	-	-	-	-	-	-	-	-	✓	-	-	-	-	-	-	-	-
Bevel Entry Clips	BEC	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	BECP	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Cord Clips, Cable Clips and Holders	ACC	-	✓	✓	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-
	LPFCM	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	FCC	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-
	AJC	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-
	A1C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-
	A2C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-
	AMC25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-
	VCC	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	PMCC	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Material Selection Guide (continued)

	Materials	Test Method	Nylon 6.6	Weather Resistant Nylon 6.6	Impact Modified Weather Resistant Nylon 6.6	Heat Stabilized Nylon 6.6	Heat Stabilized Nylon 6.6	Heat Stabilized Weather Resistant Nylon 6.6	Impact Modified Heat Stabilized Weather Resistant Nylon 6.6	Flame Retardant Nylon 6.6	Flame Retardant Nylon 6.6	Polypropylene	Weather Resistant Polypropylene	General Purpose ABS	Weather Resistant ABS	TEFZEL	PEEK	Antimicrobial Metal Detectable Nylon	Metal Detectable Polypropylene	PVC	Weather Resistant Acetal
	Color	-	Natural, White, Black, Gray	Black	Black	Black	Natural	Black	Black	Black	Natural	Gray, White, Green	Black	Natural, White, Black, Gray	Black	Aqua Blue	Translucent Brown	Blue	Dark Blue	Light Gray, White	Black
	Part Number Suffix (Material) Designation	-	None, 20, 14	0	0	30	39	300	350	60	69	14, None, 109	100	None, 20, 14	0	76	71	96A	186	8, 10	130
Tie Anchor Mounts, Stud Mounts, Low Profile Mounts	TM	-	✓	✓	-	✓	✓	-	-	-	✓	-	✓	-	-	✓	✓	✓	✓	-	-
	SGTM	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	TA1	-	✓	✓	-	✓	-	-	-	-	✓	-	-	-	-	-	-	✓	✓	-	-
	TA2	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	SGTM	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	TMEH	-	-	✓	-	-	-	-	✓	-	-	✓	✓	-	-	-	-	-	-	-	-
	TMSTLHS	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	TMSTHS	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	LPMM / LPMS	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Harness Clips, Edge Clips	HCMP	-	✓	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	HCME	-	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
	UCC	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓
Fixed Diameter Clamps, Adjustable Clamps	CCS	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	CCH	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	Pan-Clamp (PC)	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	ARC	-	-	-	-	-	-	-	-	-	-	✓	-	-	-	-	-	-	-	-	-
Latching Wire Clips, Mounts and Holders	LWC	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	FCM	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	FCH	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	CH105	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	LC3, LC5, LC10	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	✓	-
Circuit Board Posts	CBP	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Epoxy Applied Mounts	EMS	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Material Selection Guide (continued)

		Materials	Test Method	Nylon 6.6	Weather Resistant Nylon 6.6	Impact Modified Weather Resistant Nylon 6.6	Heat Stabilized Nylon 6.6	Heat Stabilized Nylon 6.6	Heat Stabilized Weather Resistant Nylon 6.6	Impact Modified Heat Stabilized Weather Resistant Nylon 6.6	Flame Retardant Nylon 6.6	Flame Retardant Nylon 6.6	Polypropylene	Weather Resistant Polypropylene	General Purpose ABS	Weather Resistant ABS	TEFZEL	PEEK	Antimicrobial Metal Detectable Nylon	Metal Detectable Polypropylene	PVC	Weather Resistant Acetal
		Color	-	Natural, White, Black, Gray	Black	Black	Black	Natural	Black	Black	Black	Natural	Gray, White, Green	Black	Natural, White, Black, Gray	Black	Aqua Blue	Translucent Brown	Blue	Dark Blue	Light Gray, White	Black
		Part Number Suffix (Material) Designation	-	None, 20, 14	0	0	30	39	300	350	60	69	14, None, 109	100	None, 20, 14	0	76	71	96A	186	8, 10	130
Masonry Push Mounts, Fir Tree Push Mounts, Push Button Mounts	MPMS/WH	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	HVMPPM	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	SGMPMS	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	PUM	-	-	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	PUME	-	-	-	-	-	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-
	PM2H25	-	✓	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	PBMS	-	✓	✓	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Multiple Tie Plates	MTP	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	MTPC	-	-	-	-	-	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Push Barb Mounts	TM2PWH	-	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	PWMS	-	✓	✓	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

Making the connections that matter.

We have the knowledge
and experience to help
you make the most of your
infrastructure investment.

panduit.com



Let's connect
panduit.com/contact-us

PANDUIT®
infrastructure for a connected world