



CrushShield 2442 보호 슬리브 기술자료

Systems Protection Crushshield 2442 Datasheet · English Edition

Global Industrial Cable Management Solutions

(주)위트솔루션즈 | WIT Solutions Co., Ltd.

서울특별시 송파구 송파대로 167, 문정역테라타워 A동 12층 1210-1호

TEL 02-2054-8688 · FAX 02-2054-8690 · sales@witsolutions.co.kr

www.witsolutions.co.kr



IMPACT RESISTANCE

CrushShield® 2442

Product Highlights

- Operating temperature up to +150°C (+302°F)
- Excellent cut-through resistance
- Color coded for high voltage identification
- Lightweight
- Flexible
- Easy installation


Typical Applications

- High voltage electrical cables
- Wire harness
- Pipes and tubes



Our manufacturing sites are certified ISO 9001, ISO/TS 16949, or AS/EN 9100, and ISO 14001

CS2442_07202017

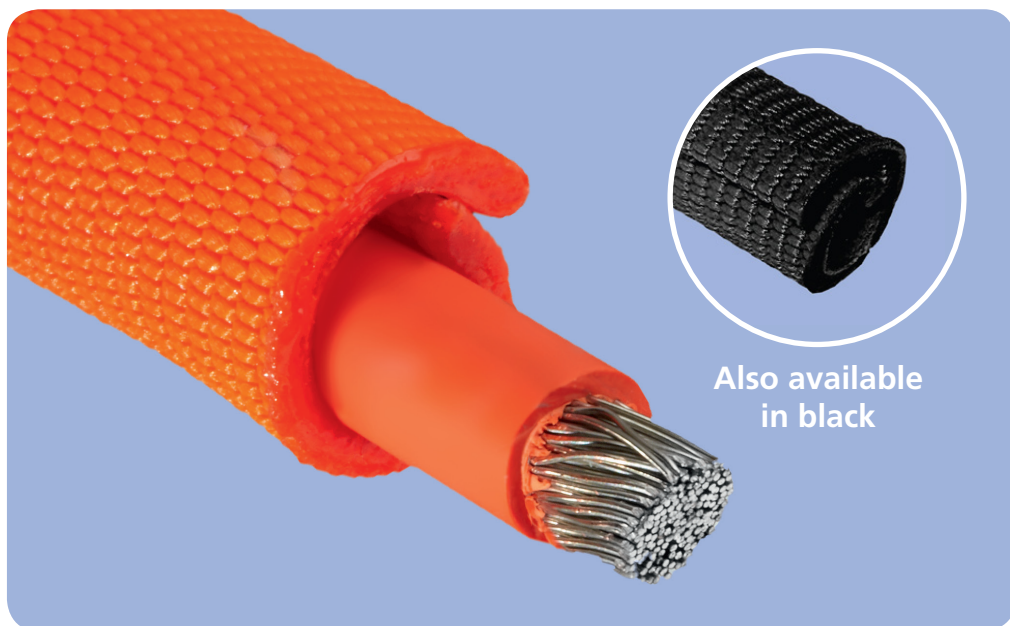

CrushShield® 2442 is a self-wrapping sleeve designed to provide superior cut-through protection for electrical cables. The tough, multilayer construction enables the product to absorb and disperse energy, thus preventing damage to the electrical cable inside. CrushShield 2442's ability to prevent cut through of electrical cables has made it a product of choice for vehicle manufacturers concerned with isolating HEV cables from the vehicles' electricity-conducting chassis in crash situations. CrushShield 2442 helps protect the HEV cable enabling the vehicle to meet stringent industry standards yet its lightweight, flexible structure does not impede cable routing or add unnecessary weight.

CrushShield 2442 is available in orange, for identification of the high voltage cables in hybrid-electric or electric vehicles, as well as black.

BentleyHarris®
Protection Products


Performance Data – CrushShield® 2442

Property	Test Method	Result
Temperature Rating	240 hours at 175°C (150°C rating)	Pass +150°C (+302°F)
Flammability	SAE J369	Self-extinguishing
Low Temperature Flexibility	BH100-016A	Pass -70°C (-94°F)
Chipping Resistance	SAE J400	Pass
Dynamic Cut-Through	ASTM D3032-10 Section 22 (modified)	650 N avg.
Fluid Resistance	BH100-003B	Pass

All numeric performance data shows average or typical values. Please consult your sales representative for product drawings, test reports and OEM approvals.

Construction and Typical Product Characteristics

Warp Yarn: Polyester (PET) multifilament
Fill Yarns: Polyester (PET) monofilament and multifilaments



End view of CrushShield 2442 illustrating self-wrapping construction.

Availability

CrushShield 2442 is available in a range of sizes and cut to your specification. Color is orange or black. Please consult your sales representative for availability.

The information and illustrations given herein are believed to be reliable. Federal-Mogul makes no warranties as to their accuracy or completeness and disclaims any liability in connection with their use. Federal-Mogul's only obligations are those in the standard term of sale for this product and Federal-Mogul will not be liable for any consequential or other damages arising out of the use or misuse of this product. Users should make their own evaluations to determine the suitability of the product for specific applications.

©2008 Federal-Mogul Systems Protection, manufacturer of Bentley-Harris protection products.

 **FEDERAL
MOGUL**
Systems Protection

USA: (1) 800 926 2472
Europe: (33) 3 44 39 06 06
Japan: (81) 45 479 0201
China: (86) 21 6182 7688

www.federalmogul.com/sp